



Terahertz Photoconductivity of Graphene Nanostructures

Jensen, Søren A.; Ulbricht, Ronald; Narita, Akimitsu; Feng, Xinliang; Müllen, Klaus; Turchinovich, Dmitry; Hertel, Tobias; Bonn, Mischa

Published in:

Proceedings of the 38th International Conference on Infrared, Millimeter and Terahertz Waves IRMMW-THz 2013

Link to article, DOI:

[10.1109/IRMMW-THz.2013.6665852](https://doi.org/10.1109/IRMMW-THz.2013.6665852)

Publication date:

2013

[Link back to DTU Orbit](#)

Citation (APA):

Jensen, S. A., Ulbricht, R., Narita, A., Feng, X., Müllen, K., Turchinovich, D., Hertel, T., & Bonn, M. (2013). Terahertz Photoconductivity of Graphene Nanostructures. In *Proceedings of the 38th International Conference on Infrared, Millimeter and Terahertz Waves IRMMW-THz 2013* IEEE. <https://doi.org/10.1109/IRMMW-THz.2013.6665852>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Terahertz Photoconductivity of Graphene Nanostructures

Søren A. Jensen^{a,b}, Ronald Ulbricht^b, Akimitsu Narita^a, Xinliang Feng^a, Klaus Müllen^a, Dmitry Turchinovich^{a,c}, Tobias Hertel^d, and Mischa Bonn^a

^a Max Planck Institute for Polymer Research, Mainz, Germany.

^b FOM Institute for Atomic and Molecular Physics, Amsterdam, The Netherlands.

^c DTU Fotonik, Technical University of Denmark, Lyngby, Denmark

^d Institute of Physical and Theoretical Chemistry, Julius-Maximilian University, Würzburg, Germany.

The photoconductive properties of graphene nanoribbons and carbon nanotubes were studied using optical pump-THz probe spectroscopy. A reduction in conductivity of GNRs compared to CNTs was observed.

I. INTRODUCTION AND BACKGROUND

Recently a “bottom-up” approach was developed for producing long graphene nanoribbons (GNRs) with well-defined edge structures and widths down to ~ 1 nm, possessing bandgaps corresponding to visible wavelengths [1]. The structure of these GNRs is shown in **Figure 1**. Carbon nanotubes (CNTs), are structurally very similar to GNRs, only ‘rolled up’ in the lateral dimension. Here, we studied semiconducting (6,5) type CNTs as shown in **Figure 2**. We present a comparative study of the transient photoconductivity of structurally defined GNRs and semiconducting CNTs, employing optical pump – THz probe spectroscopy to investigate the photogenerated species on sub ps timescales. Here charge carriers are optically excited in the sample material by an ultrashort laser pulse, and probed by a freely propagating, single cycle electromagnetic pulse consisting of frequencies in the 0.3-1.6 THz range. A schematic of the experimental setup is shown in **Figure 3**. The setup is driven by an amplified pulsed laser system which delivers pulses of 800 nm central wavelength and sub - 100 fs duration at a repetition rate of 1 kHz. A portion of these pulses (the *pump* beam in **Figure 3**) is used to photo-excite the sample directly; alternatively, the excitation wavelength can be altered first either by optical doubling crystals or by an optical parametric amplifier (OPA). Another portion of the laser beam (the *generation* beam) generates the THz probe in a ZnTe crystal by a process known as optical rectification [3]. The THz probe is focused on the sample, and then refocused on a second ZnTe crystal where it is combined with a third beam, the *sampling* beam. In this second ZnTe crystal the time-dependent electric field of the THz probe pulse is directly measured using free-space electrooptic sampling (FEOS) – an inverse optical rectification effect [3]. The electric field in the THz pulse is proportional to the ellipticity of the sampling laser beam, which is analyzed optically via a variable wave plate, a Wollaston prism (or polarizing beam splitter), and a pair of photodiodes. The differential voltage on the photodiodes, proportional to the THz field strength, is recorded with lock-in detection as function of the delay between the THz pulse and the sampling laser pulse.

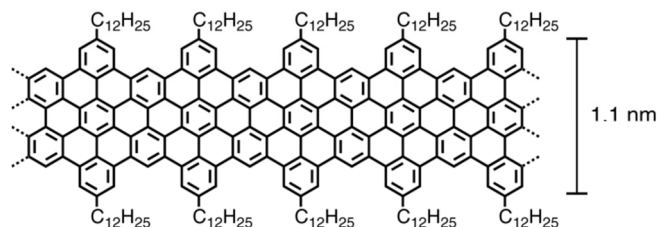


Figure 1 Molecular structure of graphene nanoribbon (GNR) of length 600 nm and effective bandgap 1.88 eV.

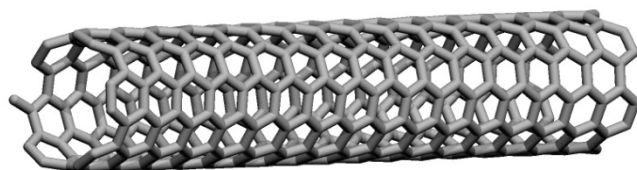


Figure 2 Molecular structure of semiconducting (6,5) carbon nanotube [2].

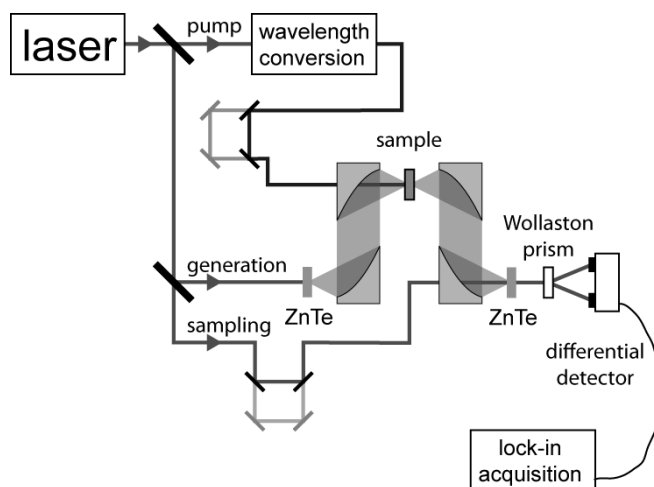


Figure 3 Sketch of optical pump – THz probe experimental setup.

II. RESULTS

Figure 4 shows the frequency-resolved real part of the photoconductivity of the GNRs, measured 300 fs after photoexcitation at 400 nm wavelength. A positive real conductivity is observed, increasing in magnitude with probe

frequency. The real part of the photoconductivity of CNTs, measured 300 fs after photoexcitation at 800 nm wavelength, is also shown in **Figure 4**. It peaks at around 1 THz. The conductivity of CNTs per absorbed photon is more than an order of magnitude higher than for GNRs. This is consistent with theoretical calculations [4] that have predicted significantly larger carrier mobilities for the CNTs than the GNRs for the materials with the bandgaps presented here.

The different possible causes for the different conductivities and the comparison to theory [4] are at the focus of our current work, and will be discussed in more detail in our contribution.

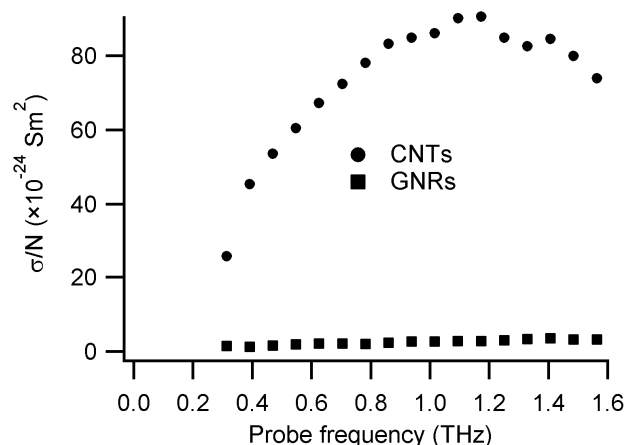


Figure 4 Real conductivity normalized by absorbed photon density for carbon nanotubes (CNTs) and graphene nanoribbons (GNRs).

REFERENCES

- [1] Chen, L. *et al.*, "From Nanographene and Graphene Nanoribbons to Graphene Sheets: Chemical Synthesis" *Angew. Chem., Int. Ed.* 2012, **51**, 7640.
- [2] Structure calculated with: TubeGen 3.4 (web-interface, <http://turin.nss.udel.edu/research/tubegenonline.html>), J. T. Frey and D. J. Doren, University of Delaware, Newark DE, 2011. And plotted with: QuoteMol, Marco Tarini, *et al.* "Ambient Occlusion and Edge Cueing for Enhancing Real Time Molecular Visualization" *IEEE Transactions on Visualization and Computer Graphics* **12**, 1237-1244, 2006.
- [3] R. Ulbricht, *et al.*, "Carrier dynamics in semiconductors studied with time-resolved terahertz spectroscopy", *Rev Mod Phys*, **83**, 543, 2011.
- [4] B. Obradovic, *et al.*, "Analysis of graphene nanoribbons as a channel material for field-effect transistors", *Appl Phys Lett* **88**, 14, 2006.